
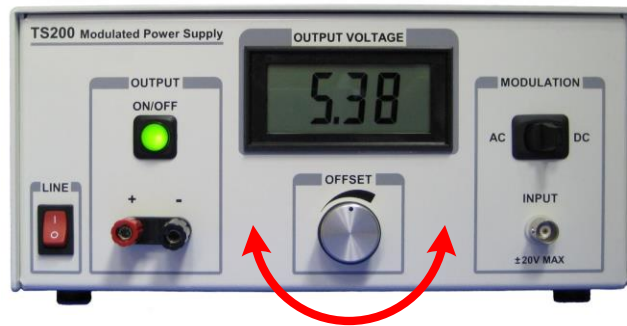


Battery Simulator Quick Start Guide


Step 1-A: Plug in the AC power cord (not shown)

Step 1-B: Turn on the TS200 by press the LINE button



Step 1-C: Enable the output by press the ON/OFF button

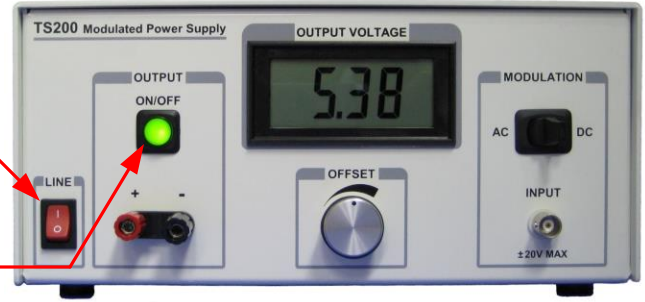

Step 2: Turn the OFFSET knob to set the simulated battery voltage (e.g. 3.8V)

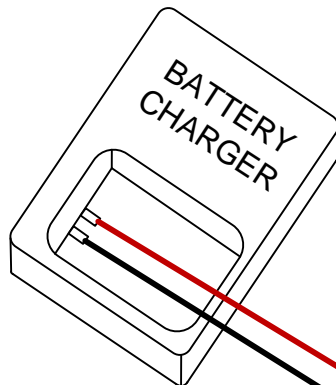

Step 3: Connect the battery charger to the TS200 OUTPUT

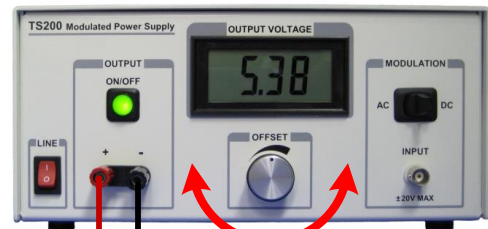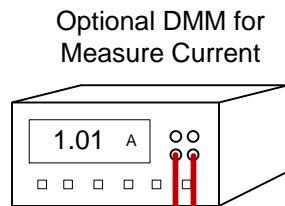

Visit our website to download additional documents such as datasheet and Application Notes.

<http://www.accelinstruments.com/Download/Download.html>